

Modeling Internet Search Behavior of Cross-Laminated Timber

Brian K. Via
David Kennedy
Maria S. Peresin

Abstract

The Internet is a powerful tool that can be leveraged to explore user search behavior. Google Trends is a compelling database that tracks the frequency with which all users search any given word. There is thus an opportunity to see if the search histories obtained from Google Trends can be merged with data analytics to tease out underlying relationships with similar searches for cross-laminated timber (CLT). In this study, multiple linear regression was used to predict the search strength of the term *cross laminated timber* from 60 possible variables that may be directly or indirectly associated with CLT. This study was able to model the search term *CLT* ($R^2 = 0.76$) using a reduced model of 20 variables. However, while prediction strength was strong, our primary interest was to statistically classify and rank important variables that might be important to CLT. To achieve this, the Mallow's C_p statistic was used to build the most robust model possible. To confirm with the literature, we also compared our study with another Web-based study and found a significant linear relationship between the t statistic in our study and the frequency of the same or similar search term in their study ($R^2 = 0.76$). This agreement between studies helps to support our hypothesis that multiple linear regression coupled with Google Trends is a new tool that may assist marketers to identify emerging trends important to CLT.

Cross-laminated timber (CLT) gained traction in the early 1980s in Germany and is currently well used across Europe (Udele et al. 2021). CLT is considered to be more carbon friendly than competing materials such as steel, concrete, and brick (Espinoza et al. 2016, Franzini et al. 2021). Nonresidential buildings as tall as 18 stories are under current consideration or construction as society begins to accept its effectiveness against earthquakes and fire along with value attributes such as a favorable strength:weight ratio and carbon sequestration (Espinoza et al. 2016, MIT 2020). Over the past 5 years, CLT has garnered more attention in the United States, particularly in the Pacific Northwest. Figure 1 demonstrates this attention by showing the frequency of searches for CLT by state. Oregon has the highest search strength along with California and Washington. Conversely, the search strength for CLT in the southeastern United States is much less frequent and could be reflective of a lag in manufacturing and construction in this region, although recently industrial interest seems to be picking up. One of the goals of this research is to uncover terms that correlates with CLT and gauge citizen interest.

Use of big data obtained from the Internet for use in analyzing citizen behavior is gaining traction. For example, Thomas et al. (2020) used an internet Web crawler to investigate potential variables most associated with the term *CLT*. More recently, it was demonstrated that the lumber-

future price index could be predicted on a daily basis from Google Trends data (He et al. 2022). In the automotive industry, it was shown that the “live” automotive index could be used to predict real-time sales (Carrière-Swallow and Labbé 2013). In short, being able to monitor real-time data, such as that provided by Google Trends, can help policy makers or industry cohorts better navigate the business platform under dynamic conditions. This practice is called nowcasting, which is the prediction of the present with currently emerging data (He et al. 2022). In this paper, we considered daily acquired historical data and not real-time modeling. We then built models predicting the search strength of the term *CLT* from various variables or terms that are thought to possibly associate with CLT. Multiple

The authors are, respectively, Director and Regions Bank Professor, Forest Products Development Center, College of Forestry, Wildlife and Environ., Auburn Univ., Auburn, Alabama (briankvia@auburn.edu [corresponding author]); Assistant Professor, Univ. of Arkansas, Fayetteville, Arkansas (davidk@uark.edu); and Assoc. Professor, Forest Products Development Center, College of Forestry, Wildlife and Environ., Auburn University, Auburn, Alabama (soledad.peresin@auburn.edu). This paper was received for publication in September 2022. Article no. 22-00057.

©Forest Products Society 2023.

Forest Prod. J. 73(1):53–58.

doi:10.13073/FPJ-D-22-00057

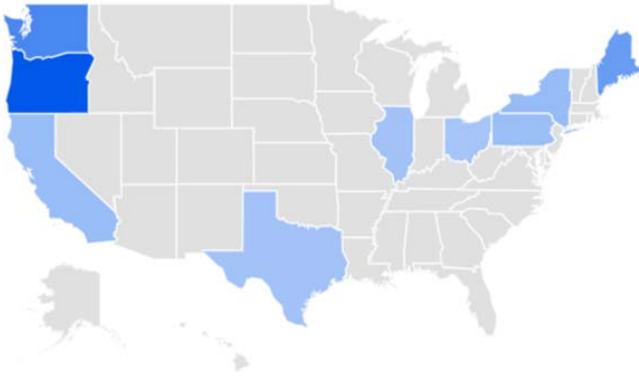


Figure 1.—Search strength (0 to 100) of the term cross laminated timber for 5 years (March of 2015 to 2020) during which the most searched (Oregon) received a relative rating of a 100 and the lightest colored states received a score of 7.

linear regression models were then built to help identify and rank important variables that are successful in the prediction of CLT.

Materials and Methods

The search strength of the term *CLT* was obtained from the Google Trends database from January 2015 to April 2020 for a total of 151 sample points. CLT time-matched data were also downloaded from Google Trends for the variables outlined in the Appendix. It is important to note that Google Trends will standardize each variable to a scale of 0 to 100 to represent the interest over time. Data from the entire United States were used for modeling.

SAS (version. 9.4; SAS Institute Inc., Cary, North Carolina) statistical software was used for all modeling and significance testing. Multiple linear regression was run to see whether Google Trends data could be used to predict the search strength of CLT. The PROC Reg procedure was run with the Mallow’s *C_p* selection method to pick the best model. The variance inflation factor (VIF) was also executed to ensure the coefficients were not inflated as a result of excessive correlation between the independent variables. It was assumed the coefficients were inflated if the VIF factor was >10. A *P* value <0.10 was used as the threshold to determine statistical significance. The independent variables would change in *P* value with addition or subtraction of other variables, so it was found that a threshold of 0.10 generally gave more stable rankings.

Results and Discussion

Long-term model

A full multivariate model (60 variables) was run and then down-selected to the most robust model using Mallow’s *C_p* as the selection criteria. The final model was reduced from 60 to 20 variables based on a *P* value criteria <0.1. Table 1 is presented with the most significant variable at the top (concrete) and the least significant at the bottom (LEED). Figure 2 demonstrates the actual versus predictive performance of the model.

The term *concrete* was most related to the search term *CLT* (Table 1). Concrete is known to be preferred by the tall building industry for its low cost of construction, cost of maintenance, and fire-retardant nature; however, wood multistory buildings are gaining traction with civil servants

Table 1.—Key words that were statistically important in the prediction of the search strength of cross laminated timber. Ordinary least squares regression was deployed from January 2015 to April 2020, during which the data were collected on a weekly basis (*n* = 260 weeks). The *C_p* method was used to determine the appropriate model. * Architecture and Design were combined because of a high covariance (*r* = 0.763; *P* <0.0001; VIF >10). LEED is Leadership in Energy and Environmental Design.

Key words in this study	<i>P</i> value	Absolute <i>t</i> value
Concrete	<0.0001	9.87
Hybrid composites	<0.0001	4.82
Architecture/Design	<0.0001	4.71
Construction	<0.0001	4.18
UV	<0.0001	4.10
Tall timber	<0.0001	4.00
Single family	0.0002	3.83
Durability	0.0008	3.39
Acoustics	0.0030	2.99
Nanotechnology	0.0018	3.15
Connection System	0.0043	2.88
Fire	0.0052	2.82
Polymer films	0.0140	2.48
Speed of construction	0.0163	2.40
Adhesive	0.0208	2.33
Life-cycle assessment	0.0269	2.23
Vibration	0.0561	1.92
Creep	0.0619	1.88
Steel	0.0668	1.84
LEED	0.0692	1.83

and land use planners as they learn about wood resistance to fire through charring (Babrauskas 2005). It has been shown that the charring of wood offers protection, even at a low moisture and across a range of wood densities (Janssens 2004). Concrete is also weaker in tension than wood and reinforcement rods, such as those made of steel, are often needed to protect against earthquakes. In contrast, wood has

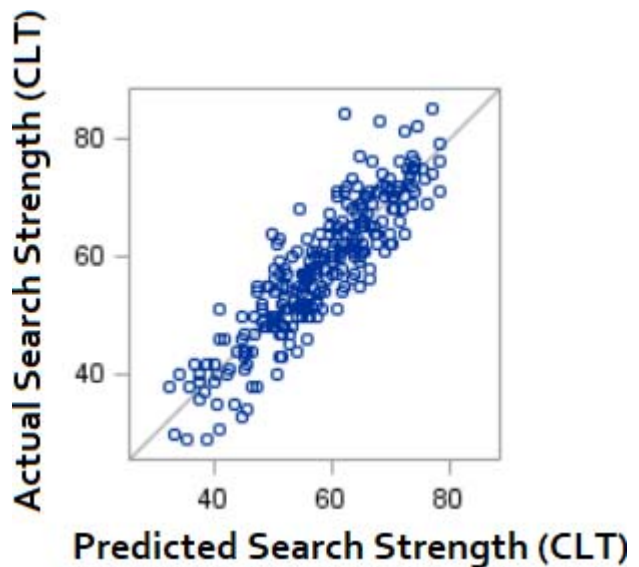


Figure 2.—Actual versus predicted search strength of the term cross laminated timber (*CLT*), in which the $R^2 = 0.7863$ and Adjusted $R^2 = 0.7675$ and were generated from the same model in Table 1.

a plastic response to earthquake-type forces because the lignin in the S1–S3 layer of the cell wall helps to provide plasticity against these sudden forces (Via et al. 2009). As such, CLT has a seismic advantage over concrete.

Hybrid composites was the second most statistically significant key word associated with CLT (Table 1). *Hybrid composites* in the CLT literature has been defined as a combination of CLT and another material, such as concrete, to provide the improved tensile strength of wood with the higher compression strength of concrete (Mai et al. 2018). Wang et al. (2018) defines a hybrid composite as the incorporation of wood composites as a laminate in CLT. As an example, a CLT member in a steel frame was used to combine the ductility and strength of steel with the high strength-to-weight ratio of wood (Dickof et al. 2012). In this study, the vibration ($P = 0.0561$) and acoustics ($P = 0.003$) was important in predicting the search frequency of CLT. Seismic vibration testing has been shown to be useful for the simulation of earthquakes to ensure tall timber ($P = 0.0001$) buildings can survive the event and absorb these short-term forces. The International Building Code has minimum requirements for sound insulation and wood has been shown to be useful in acoustic function (IBC 2021).

Architecture was another key word heavily associated with CLT (Table 1). Architecture is gaining momentum in the forest products industry in both existing and new structures (Franzini et al. 2021). CLT is an emerging material for architecture students as they begin to care about the environment and contribute to the circular bioeconomy.

New product development opportunities

Durability was an important key word to help in the prediction of CLT search strength (Table 1). Durability is the resiliency of wood against the interaction of water with biological agents; although, ultraviolet (UV) light is gaining traction as an important durability topic. In our discussion with wood preservative treatment companies, the use of wood preservatives in CLT is highly needed. This was confirmed by Udele et al. (2021), who cautioned that wood preservatives with significant volatile organic compounds emissions could be harmful to human health.

Degradation concerns are especially prevalent in the southeastern United States because of favorable moisture and temperature. For example, when using CLT in tropical locations, there is a concern that microorganisms such as fungi and insects (termites) can degrade the wood under favorable moisture and temperature conditions (Oliveira et al. 2018). To date, perhaps durability has not been appropriately addressed because CLT buildings have been concentrated primarily in Europe, Canada, and the US Pacific Northwest.

According to a Pearson correlation coefficient analysis, UV was highly correlated to durability ($P < 0.0001$). Thus, there may be significant interest in UV coatings for the protection of CLT from outdoor environments. In US construction, CLT can be exposed to UV and moisture from rain before the roof is erected (Schmidt et al. 2019). However, UV is more of a long-term weathering event in which photo-oxidation occurs at the wood surface because of UV radiation. They point out that in the southern United States, UV coatings such as water repellents, paints, stains, or varnishes are common treatments for wood substrates. In our study, polymer films were found to be important ($P =$

0.014) to CLT and may be a new avenue for UV coating research.

Moving into the future, nanotechnology will be important for UV coatings, adhesives, and general durability ($P = 0.0018$) in materials such as CLT. For this study, polymer films were important ($P = 0.0140$) to CLT and could be combined with nanotechnology for new product development. Often the philosophy with nanotechnology is to break down the material to the nanoscale to concentrate and elevate a particular property of interest within the coating, polymer, or composite. Commonly, 0.5 to 5 percent weight application is used to enhance substrate properties without adding too much cost (Via and Peresin 2020). In the case of using nanocellulose for improved strength, the costs of the wood composite can actually be lowered even though the cost of nanocellulose may potentially be much higher than pulp (Via and Peresin 2020).

Connection systems may be another development opportunity for CLT ($P = 0.0043$). Common connection properties include withdrawal, lateral nail resistance, and dowel bearing strength (Sinha and Avila 2014). In the Southeast, it is likely that we will need to test for connection reliability on a fairly new resource: juvenile wood. Loblolly pine (*Pinus taeda*) is the key plantation species grown in the Southeast and is part of the southern yellow pine (SYP) group that companies use within our region (Hindman and Golden 2020). However, SYP is harvested at a much younger age, which results in a higher microfibril angle, lower density, higher lignin, and lower cellulose (Essien et al. 2017). The combination of lower quality fiber morphology and wood polymer chemistry results in a robust reduction in tissue stiffness and can lead to more vibration in forest products. Increased vibration and deflection values could limit the ability to reach desired spans when using CLT for housing and offices (Baño et al. 2016); unless, the thickness of the CLT timbers overcomes vibration issues. Hindman and Golden (2020) point out that SYP must be examined for their acoustical response in order to be accepted by building codes. A similar concern was echoed by Azambuja et al. (2022), who pointed out that the nondestructive vibration technique used to estimate stiffness did not statistically provide an equivalent yield when compared with visual grading of yellow poplar used to make CLT.

Adhesives are another type of connection that may be important to CLT ($P = 0.0208$). In SYP, prevention of adhesive delamination will be an important consideration because of the high longitudinal shrinkage potential along the grain of juvenile wood lumber (Ying et al. 1994). Abnormal shrinkage or swelling in this plane could result in additional forces at the glue line, thus resulting in delamination failure. Although not attributable to juvenile wood, delamination in CLT has already occurred in the United States for Douglas-fir (*Pseudotsuga menziesii*; Riggio et al. 2019). Delamination of the adhesive bondline can also occur if elevated fire temperatures can reach the bondline before the wood is able to self-insulate with char (Zelinka et al. 2019). They demonstrate that the best adhesive for this scenario would be melamine formaldehyde and phenol-resorcinol formaldehyde, which maintained wood failures as high as 260°C. In this study, the key word *fire* was interesting to those searching for CLT ($P = 0.0052$). In the literature, CLT has been shown to outperform steel at higher temperatures (Asdrubali et al. 2017). In general, the most

common adhesives used in CLT are polyurethanes, melamine formaldehyde, and phenol–resorcinol formaldehyde (Zelinka et al. 2019). Emulsion–polymer–isocyanate adhesives (EPI) are also allowed, which have superior moisture resistance, are fast-curing at room temperature, and exhibit low creep during long-term loading (Grstad and Pedersen 2010). Creep was found to possibly be important to CLT search strength at the 90 percent level in this study.

Modeling during COVID-19

Understanding the impact of COVID-19 was not the intent of this study; however, COVID-19 emerged just as we were testing model validity. So we include this analysis, which may be of interest to the readers.

During the short COVID-19 period covered in this study, prediction of CLT search strength in real time accounted for nearly one-half of the variance when only four variables were used: hybrid composite, acoustic, code, and lumber strength (Table 2). Similar to the long-term model, the hybrid composite term exhibited the greatest significance to the search term *CLT*.

An investigation of heavily searched Web pages during that COVID-19 time frame may yield some insight as to why these four variables were important. For example, a highly searched Web site revealed a blog with the opinion that lightweight wood can be used in conjunction with steel and concrete to make hybrid composites and improve building sustainability (Valipour 2020). Likewise, Waugh Thistleton Architects designed a building using steel columns and a cellular beam frame with CLT floors to make hybrid composites (Grimes 2020). Urech et al. (2020) posted a story demonstrating a timber-composite system with a concrete slab on top of a wooden timber element. They stress that the wood allows for additional tensile strength while reducing the weight of the structure. They also were targeting a lower carbon footprint, which helps with the life-cycle assessment (LCA) of the system. LCA was deemed important to CLT search strength in this study ($P = 0.0269$). Asdrubali et al. (2017) discusses that LCA helps to ensure the environment, resource, and energy sustainability is maintained beyond some breakeven point. Compared with steel and concrete, Asdrubali showed that wood has a better performance in several LCA outputs including smog generation, ozone, global warming potential, and petroleum consumption.

During the COVID outbreak, the key word *acoustics* rose in significance in comparison with the long-term model, suggesting a possible increase in societal interest in acoustics (Table 2). A look at Google Scholar during this timeframe yielded many Web sites from architecture and wood

construction manufacturing in which CLT was promoted as a way to improve sound control. Likewise, Peters and Daniels (2020) suggested that CLT could help to scatter sound in buildings. They propose to carve geometric patterns in wood to scatter sound, which helps with acoustic performance of rooms. Wood is a light material with a lower density than other materials; therefore, its sound insulation is not very good but densifying the wood helps to better reflect sound and is used in music halls (Asdrubali et al. 2017).

During the pandemic, there was also heightened interest in the key word *code* as associated with the search term *CLT* ($P = 0.0004$). The increased interest in code is probably attributable to the anticipated update of the US International Building Code (IBC). One well-searched Web site during this time frame pointed out there were 14 proposed code changes for 2021 IBC revision (Hunt 2020), which would remove hurdles to the use of CLT and other mass timber products for tall buildings.

Literature support for the long-term model

The study by Thomas et al. (2020) used a Web crawler to search Web sites with the term *CLT* and then backtracked the frequency of other terms used in the same Web page. The idea was to use the frequency of these terms as an indication of their importance to CLT. Figure 3 demonstrates the terms from their study that were also investigated in our study, using either exactly the same term or a synonym to our key words. There was a significant linear relationship between the t values of our model and the frequency of key words associated with CLT in Thomas et al. (2020). In the instance of a synonym, we listed both terms with ours being first and then the Thomas et al. term listed after the comma. It should be noted that our data analysis partially overlapped the same period of data collection as that of Thomas et al., resulting in similar rankings in variables and their importance to CLT.

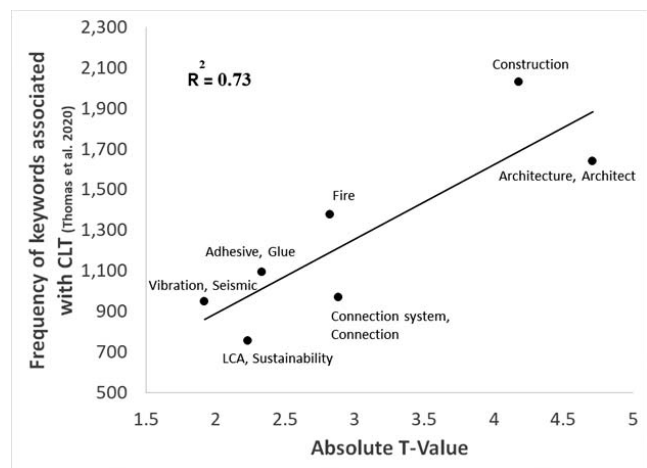


Figure 3.—Comparison of priority rankings of important variables to the key word CLT, in which our key words were ranked based on the strength of the t statistic from the multiple regression model in the prediction of CLT. For Thomas et al. (2020), the ranking was based on the number of times a key word showed up in a relevant CLT Web page as identified by their specialized data crawler algorithm. Note that when two synonyms are listed, the first represents the term used in this study (x-variable) and the second term represents the term used in Thomas et al. (2020).

Table 2.—Cp determined ordinary least squares calibration model from April 1, 2020 to September 1, 2020, during US COVID-19 economic shutdown, in which data were collected on a daily basis ($n = 151$ days).

Variable	t value	Approx Pr > $ t $	Variance inflation
Intercept	4.14	<0.0001	0
Acoustic	-4.92	<0.0001	1.2897
Hybrid composite	6.70	<0.0001	1.0782
Code	3.64	0.0004	1.2968
Lumber strength	1.88	0.0622	1.0162

However, when we ran a new model between April 2020 and December 2022 (model not shown), we found that the rankings and statistical significance changed. This suggests that correlations between key words and CLT shift with time, and thus the rankings in this study may not reflect future societal behavior. For future studies, we recommend further validation of modeling with Google Trends using our method, in an effort to disprove the hypothesis that we were just “data fitting” random patterns between variables. We were concerned about this possibility and therefore encourage future studies to continue to test this hypothesis.

Conclusions

This work tested the hypothesis that Google Trends represents the thoughts of the community and those underlying relationships that may provide insight as to what variables are important to CLT. It was found that multiple linear regression could be used to relate 20 variables to the search frequency of the term *CLT* ($R^2 = 0.76$). Of all the variables, concrete, hybrid composites, architecture or design, construction, UV, and tall timber ranked the highest among users who also searched for CLT. Future work should help to continue to validate, or find limitations to, this new technique of using big data from the Internet for predictive purposes.

Literature Cited

- Asdrubali, F., B. Ferracuti, L. Lombardi, C. Guattari, L. Evangelisti, and G. Grazieschi. 2017. A review of structural, thermo-physical, acoustical, and environmental properties of wooden materials for building applications. *Build. Environ.* 114:307–332.
- Azambuja, R., D. DeVallance, and J. McNeel. 2022. Evaluation of low-grade yellow-poplar (*Liriodendron tulipifera*) as raw material for cross-laminated timber panel production. *Forest Prod. J.* 72(1):1–10.
- Babrauskas, V. 2005. Charring rate of wood as a tool for fire investigations. *Fire Safety J.* 40(6):528–554.
- Baño, V., D. Godoy, and A. Vega. 2016. Experimental and numerical evaluation of cross-laminated timber (CLT) panels produced with pine timber from thinnings in Uruguay. *In: World Conference on Timber Engineering*, August 22–25, 2016, Wien, Austria. pp. 1–8.
- Carrière-Swallow, Y. and F. Labbé. 2013. Nowcasting with Google Trends in an emerging market. *J. Forecast.* 32(4):289–298.
- Dickof, C., S. F. Stiemer, and S. Tesfamariam. 2012. Wood-steel hybrid seismic force resisting systems: Seismic ductility. *World Conf. Timber Eng.* July 16–19, 2012:104–111.
- Espinoza, O., V. R. Trujillo, M. F. L. Mallo, and U. Buehlmann. 2016. Cross-laminated timber: Status and research needs in Europe. *BioResources* 11(1):281–295.
- Essien, C., B. K. Via, Q. Cheng, T. Gallagher, T. McDonald, X. Wang, and L. G. Eckhardt. 2017. Multivariate modeling of acoustomechanical response of 14-year-old suppressed loblolly pine (*Pinus taeda*) to variation in wood chemistry, microfibril angle and density. *Wood Sci. Technol.* 51(3):475–492.
- Franzini, F., S. Berghäll, A. Toppinen, and R. Toivonen. 2021. Comparing wood versus concrete: An explorative study on municipal civil servants’ beliefs about multistory building materials in Finland. *Forest Prod. J.* 71(1):65–76. <https://doi.org/10.13073/FPJ-D-20-00038>
- Grimes, P. 2020. Commercial buildings: Towards hybrid framing. <https://engenuiti.com/our-thinking/commercial-buildings-towards-hybrid-framing>. Engenuiti, London. Accessed September 29, 2020.
- Grstad, K. and A. Pedersen. 2010. Emulsion polymer isocyanates as wood adhesive: A review. *J. Adhes. Sci. Technol.* 24(8–10):1357–1381.
- He, M., W. Li, B. K. Via, and Y. Zhang. 2022. Nowcasting of lumber futures price with Google Trends Index using machine learning and deep learning models. *Forest Prod. J.* 72(1):11–20. <https://doi.org/10.13073/FPJ-D-21-00061>
- Hindman, D. P. and M. V. Golden. 2020. Acoustical properties of southern pine cross-laminated timber panels. *J. Archit. Eng.* 26(2):05020004. [https://doi.org/10.1061/\(ASCE\)AE.1943-5568.0000407](https://doi.org/10.1061/(ASCE)AE.1943-5568.0000407)
- Hunt, A. 2020. Wood and evolving codes: The 2018 IBC and Emerging Wood Technologies: Building codes are evolving to support new technological developments for one of our oldest building materials. Continuing Education Center, https://continuingeducation.bnppmedia.com/article_print.php?C=1941&L=312. Accessed September 29, 2020.
- (IBC) International Code Council. 2021. International Building Code. International Code Council, Country Club Hills, Illinois.
- Janssens, M. L. 2004. Modeling of the thermal degradation of structural wood members exposed to fire. *Fire Mater.* 28(2-4):199–207.
- Mai, K. Q., A. Park, K. T. Nguyen, and K. Lee. 2018. Full-scale static and dynamic experiments of hybrid CLT–concrete composite floor. *Construct. Build. Mater.* 170:55–65.
- (MIT) Massachusetts Institute of Technology. 2020, March 5. New approach to sustainable building takes shape in Boston: A five-story mixed-use structure in Roxbury represents a new kind of net-zero-energy building, made from wood. *ScienceDaily*. <https://www.sciencedaily.com/releases/2020/03/200305203548.htm>. Accessed September 1, 2020.
- Oliveira, G. L., F. L. de Oliveira, and S. Brazolin. 2018. Wood preservation for preventing biodeterioration of Cross Laminated Timber (CLT) panels assembled in tropical locations. *Proc. Struct. Integr.* 11:242–249.
- Peters, B. and J. Daniels. 2020. Robotic fabrication of mass timber sound diffusers. Ergodomus, Pergine Valsugana, Italy. <https://www.ergodomus.it/post/robotic-fabrication-of-mass-timber-sound-diffusers>. Accessed September 29, 2020.
- Riggio, M., E. Schmidt, and G. Mustapha. 2019. Moisture monitoring data of mass timber elements during prolonged construction exposure: The case of the Forest Science complex (Peavy Hall) at Oregon State University. *Front. Built Environ.* 5:98. <https://doi.org/10.3389/fbuil.2019.00098>
- Schmidt, E. L., M. Riggio, A. R. Barbosa, and I. Mugabo. 2019. Environmental response of a CLT floor panel: Lessons for moisture management and monitoring of mass timber buildings. *Build. Environ.* 148:609–622.
- Sinha, A. and D. G. Avila. 2014. Lateral load-carrying connection properties and withdrawal capacity of hybrid poplar. *Wood Fiber Sci.* 46(1):97–108.
- Thomas, E., O. Espinoza, R. Bora, and U. Buehlmann. 2020. A specialized data crawler for cross-laminated timber information resources. *Forest Prod. J.* 70(3):256–261.
- Udele, K. E., J. Morrell, and A. Sinha. 2021. Biological durability of cross-laminated timber—The state of things. *Forest Prod. J.* 71(2):124–132.
- Urech, P., J. Fagnan, S. Buncic, E. Chung, E. Gordon, and T. Luthi. 2020. Timber–concrete composite systems: Lighter weight and lower carbon. Entuitive, Calgary, Canada. <https://www.entuitive.com/ensight-trend-home/timber-concrete-composite-systems-lighter-weight-and-lower-carbon/>. Accessed September 29, 2020.
- Valipour, H. 2020. The future is multiple: Hybrid and composite steel–timber–concrete structures. University of New South Wales Sydney, Centre for Infrastructure Engineering and Safety. <http://www.cies.unsw.edu.au/the-future-is-multiple-hybrid-and-composite-steel-timber-concrete-structures>. Accessed September 29, 2020.
- Via, B. K. and S. Peresin. 2020. Cost analysis of lightweight wood panels strengthened with lignin–cellulose nanofibrils. *BioProd. Bus.* 5(6):63–68.
- Via, B. K., C. L. So, T. F. Shupe, L. H. Groom, and J. Wikaira. 2009. Mechanical response of longleaf pine to variation in microfibril angle, chemistry associated wavelenghts, density, and radial position. *Compos. Part A: Appl. Sci. Manuf.* 40(1):60–66.
- Wang, J. B., P. Wei, Z. Gao, and C. Dai. 2018. The evaluation of panel bond quality and durability of hem–fir cross-laminated timber (CLT). *Eur. J. Wood Wood Prod.* 76(3):833–841.
- Ying, L., D. E. Kretschmann, and B. A. Bendtsen. 1994. Longitudinal shrinkage in fast-grown loblolly pine plantation wood. *Forest Prod. J.* 44(1):58–62.
- Zelinka, S. L., K. Sullivan, S. Pei, N. Ottum, N. J. Bechle, D. R. Rammer, and L. E. Hasburgh. 2019. Small scale tests on the performance of adhesives used in cross laminated timber (CLT) at elevated temperatures. *Int. J. Adhes. Adhes.* 95:102436. <https://doi.org/10.1016/j.ijadhadh.2019.102436>

Appendix.—List of 60 variables or terms searched for on Google Trends and used to predict cross laminated timber (CLT) term search strength. These variables were selected through (a) the related search query feature in Google Trends, (b) frequently seen terms in CLT-based Web pages from the Internet, (c) and personal experiences with CLT.

Cross laminated timber (dependent variable), Flame spread, lumber strength, seismic performance, wood connections, architecture, construction, building code, acoustic, hybrid, durability, adhesives, stainability, tall timber, fire, earthquake, design, concrete, steel, mass timber, carbon sequestration, LCA, speed of construction, delamination, greenhouse gasses, woodworks, international building code, green building, Leadership in Energy and Environmental Design (LEED), polymer film, lignin, hydrophobicity, glue laminated timber, lumber price, national design specification, building insulation, thermal battery, masonry, ANSI, engineered wood, single family, pavilion, melamine, phenol formaldehyde, polyurethane resin, high rise building, modular construction, load bearing, connection system, long span, isocyanate, nanotechnology, vibration, creep, safe room, weathering, ultraviolet

R-Square = 0.45; Adjusted R-Square = 0.44.